

# OCSim Modules

## (EM Waves: Propagation of Rectangular Waves)

MODULE 1: EM WAVES:PROPAGATION OF  
RECTANGULAR WAVES  
CODESSCIENTIFIC

# CodeSScientific

## OCSim Advanced Level Software Modules

### **Softwares for Fiber Optic Communication Systems**

#### **Module 1: EM Waves: Propagation of Rectangular Waves**

**Scientific Manual**

**Background Theory and Formulation of the Module**

CodeSScientific

[sales@codesscientific.com](mailto:sales@codesscientific.com) / [www.codesscientific.com](http://www.codesscientific.com)

This Fiber Optic Communication Systems Software Module with Matlab Files is a part of proprietary OCSim product from CodeSScientific ([www.codesscientific.com](http://www.codesscientific.com)). The copyright owners of this Software Module with Matlab Files are CodeSScientific and Professor Shiva Kumar, McMaster University, Hamilton, Canada.

**Copyright** © CodeSScientific and Professor Shiva Kumar, McMaster University, Hamilton, Canada

All rights reserved.

All OCSim documents, including this one, and the information contained therein, is copyright material.

Information in this document is subject to change without notice and does not represent a commitment on the part of CodeSScientific. The source codes and softwares described in this document is furnished under a License Agreement and may be used accordance with the terms of the agreement. Source codes and softwares copying is against the law except as specifically allowed in the license agreement.

### **Trademarks**

OCSim is the trademark of CodeSScientific.

All other products and companies mentioned herein are trademarks of their respective owners.

### **Disclaimer**

CodeSScientific makes no representation or warranty with respect to the adequacy of this documentation or the programs which it describes for any particular purpose or with respect to its adequacy to produce any particular result. In no event shall CodeSScientific, its employees, its contractors or the authors of this documentation be liable for special, direct, indirect or consequential damages, losses, costs, charges, claims, demands, or claim for lost profits, fees or expenses of any nature or kind.

# Electromagnetics

## Background Theory and Formulation of the Module

### Maxwell's Equation in Source-Free Region

$$\nabla \cdot \mathbf{D} = 0 \quad (1)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (2)$$

$$\nabla \times \mathbf{E} = - \frac{\partial \mathbf{B}}{\partial t} \quad (3)$$

$$\nabla \times \mathbf{H} = - \frac{\partial \mathbf{D}}{\partial t} \quad (4)$$

### Electromagnetic Wave

Suppose the electric field is only along x-direction,

$$\mathbf{E} = E_x \mathbf{x} \quad (5)$$

and magnetic field is only along y-direction,

$$\mathbf{H} = H_y \mathbf{y} \quad (6)$$

Substituting Eqs. (5) and (6) into Maxwell's equations, we find,

$$\frac{\partial^2 E_x}{\partial z^2} = \mu \epsilon \frac{\partial^2 E_x}{\partial t^2} \quad (7)$$

The above equation is called the *wave equation* and it forms the basis for the study of electromagnetic wave propagation.

## Free Space Propagation

For free space,  $\epsilon = \epsilon_0 = 8.854 \times 10^{-12} \text{C}^2/\text{Nm}^2$ ,  $\mu = \mu_0 = 4\pi \times 10^{-7} \text{N/A}^2$ , and

$$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}} \cong 3 \times 10^8 \text{m/s} \quad (8)$$

where  $c$  is the velocity of light in free space.

## Propagation in a Dielectric Medium

Similar to Eq. (8), velocity of light in a medium can be written as,

$$v = \frac{1}{\sqrt{\mu \epsilon}} \quad (9)$$

where  $\mu = \mu_0 \mu_r$  and  $\epsilon = \epsilon_0 \epsilon_r$ . Therefore,

$$v = \frac{1}{\sqrt{\mu_0 \epsilon_0 \mu_r \epsilon_r}} \quad (10)$$

Using Eq. (9) in Eq. (10), we have,

$$v = \frac{c}{\sqrt{\mu_r \epsilon_r}} \quad (11)$$

For dielectrics,  $\mu_r = 1$  and velocity of light in a dielectric medium can be written as,

$$v = \frac{c}{\sqrt{\epsilon_r}} = \frac{c}{n} \quad (12)$$

where  $\sqrt{\epsilon_r}$  is called the refractive index of the medium. The refractive index of a medium is greater than 1 and velocity of light in a medium is less than that in free space.

## 1-Dimensional Wave Equation

Using Eq. (9) in Eq. (7), we obtain,

$$\frac{\partial^2 E_x}{\partial z^2} = \frac{1}{v^2} \frac{\partial^2 E_x}{\partial t^2} \quad (13)$$

To solve Eq. (13), let us try a trial solution of the form,

$$E_x(t, z) = f(t + \alpha z) \quad (14)$$

where  $f$  is an arbitrary function of  $t + \alpha z$ . Let,

$$u = t + \alpha z \quad (15)$$

$$\frac{\partial u}{\partial z} = \alpha, \quad \frac{\partial u}{\partial t} = 1 \quad (16)$$

$$\frac{\partial E_x}{\partial z} = \frac{\partial E_x}{\partial u} \frac{\partial u}{\partial z} = \frac{\partial E_x}{\partial u} \alpha \quad (17)$$

$$\frac{\partial^2 E_x}{\partial z^2} = \frac{\partial^2 E_x}{\partial u^2} \alpha^2 \quad (18)$$

$$\frac{\partial^2 E_x}{\partial t^2} = \frac{\partial^2 E_x}{\partial u^2} \quad (19)$$

Using Eqs. (18) and (19) in Eq. (13), we obtain,

$$\alpha^2 \frac{\partial^2 E_x}{\partial u^2} = \frac{1}{v^2} \frac{\partial^2 E_x}{\partial u^2} \quad (20)$$

Therefore,


$$\alpha = \pm \frac{1}{v} \quad (21)$$

$$E_x = f\left(t + \frac{z}{v}\right) \text{ or } E_x = f\left(t - \frac{z}{v}\right) \quad (22)$$

The negative sign implies a forward propagating wave and the positive sign indicates a backward propagating wave. Note that  $f$  is an arbitrary function and it is determined by the initial conditions as illustrated by the following examples.

### Example 1.

Turn on the flash light for 1 ms and turn it off. You will generate a pulse shown in Fig.1 at the flash light ( $z = 0$ ). The electric field intensity oscillates at light frequencies and the rectangular shape shown in Fig. 1 is actually the absolute field

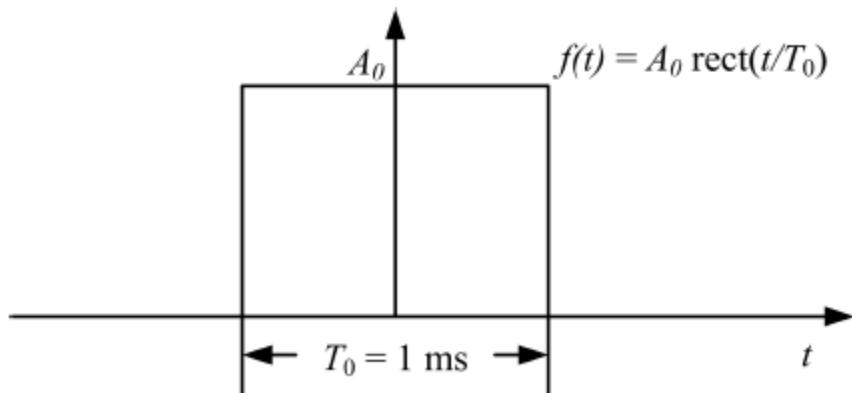

**Figure 1.** Electrical field  $E_x(t, 0)$  at the flash light


envelope. Let us ignore the fast oscillations in this example and write the field (which is actually the field envelope at  $z = 0$  as,

$$E_x(t, 0) = f(t) = A_0 \text{ rect}\left(\frac{t}{T_0}\right) \quad (23)$$

where

$$\text{rect}(x) = f(x) = \begin{cases} 1, & |x| < \frac{1}{2} \\ 0, & \text{otherwise} \end{cases} \quad (24)$$


and  $T_0 = 1$  ms. The speed of light in free space,  $v = c \approx 3 \times 10^8 \text{ m/s}$ . Therefore, it

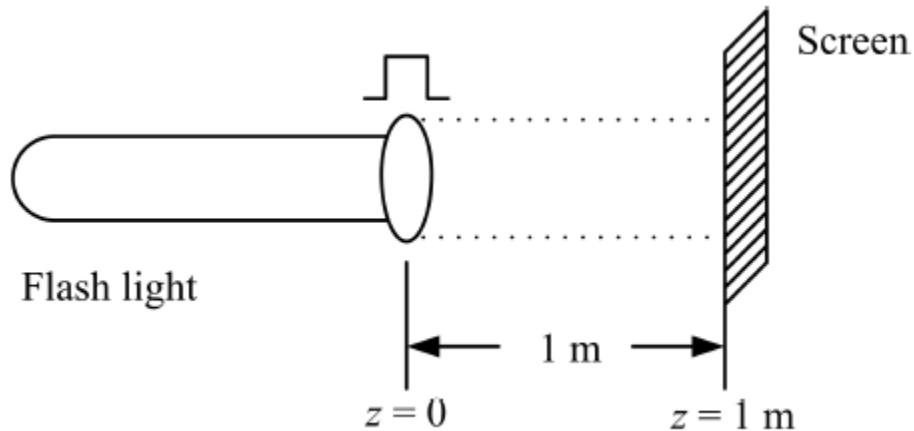

**Figure 2.** The propagation of the light pulse generated at the flash light.

takes  $0.33 \times 10^{-8} \text{ s}$  to get the light pulse on the screen. At  $z = 1 \text{ m}$ ,

$$E_x(t, z) = f\left(t - \frac{z}{v}\right) = A_0 \text{rect}\left(\frac{t - 0.33 \times 10^{-8}}{T_0}\right) \quad (25)$$

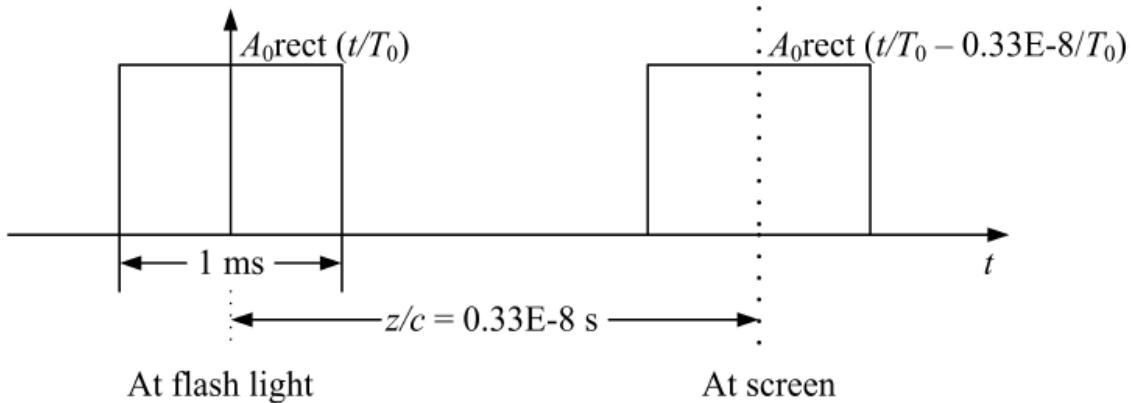


**Figure 3.** The electric field envelopes at the flash light and the screen.

**Example 2.**

A laser operates at 191 THz. Under ideal conditions and ignoring transverse distributions, the laser output may be written as,

$$E_x(t, 0) = f(t) = A_0 \cos(2 \pi f_0 t) \quad (26)$$

where  $f_0 = 191$  THz. The laser output arrives at the screen after  $0.33 \times 10^{-8}$ . The

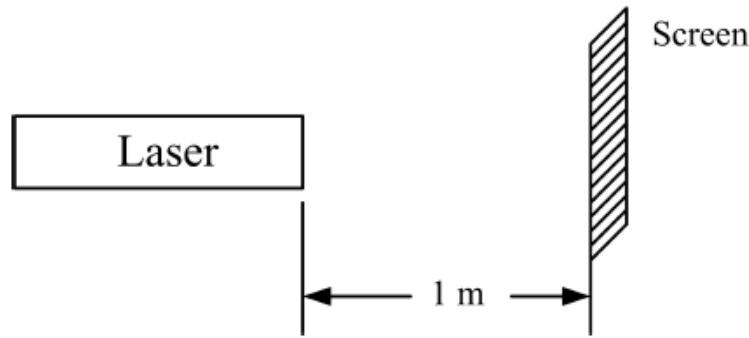


**Figure 4.** The propagation of laser output in free space.

electric field intensity at the screen may be written as,

$$\begin{aligned}
 E_x(t, z) &= f \left( t - \frac{z}{v} \right) \\
 &= A \cos \left[ 2 \pi f_0 \left( t - \frac{z}{v} \right) \right] \\
 &= A \cos[2 \pi f_0(t - 0.33 \times 10^{-8})] \quad (27)
 \end{aligned}$$

**Example 3.**

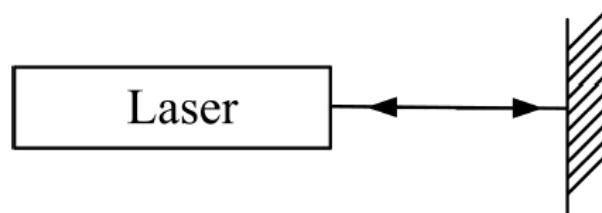

**Figure 5.** Reflection of the laser output by a mirror.

The laser output is reflected by a mirror and it propagates in backward direction as shown in Fig. 5. In Eq. (22), the positive sign corresponds to backward propagating wave. Suppose that at the mirror electromagnetic wave undergoes a phase shift of  $\emptyset$ . The backward propagating wave can be described by (see Eq. (22)),

$$E_{x^-} = A \cos[2\pi f_0(t + z/v) + \emptyset] \quad (28)$$

The forward propagating wave is described by Eq. (27),

$$E_{x^+} = A \cos[2\pi f_0(t - z/v)] \quad (29)$$

Total field is given by,

$$E_x = E_{x^-} + E_{x^+} \quad (30)$$

## Company Researchers & Developers

Integrate the Modules with your in-house and Commercial Software & Hardware Products

- (1) **Use the Existing Modules** / Components for Your Research & Development.
- (2) **Modify** the Modules / Components to the Next Level for Your Research & Development.
- (3) **Integrate** Different Modules / Components in the OCSim Package to Realize Your Own Fiber Optic Communication Systems.
- (4) **Modify** the Modules for Co-Simulations with the Third-Party Commercial Optical Communication Systems Softwares.

# Simulation of Propagation of Rectangular Waves

## Source Code File

**Main File :** rect.m


This module simulates propagation of rectangular waves.

## Explore Further this Module:

- 1. Run** the source code and **plot** the electric field as a function of propagation distance for various time-steps.
- 2. Modify** the source code (rect.m) and **plot** the electric field as a function of time for various distances.

## Selected Simulated Results Using this Module

### Propagation of a Rectangular Wave for Various Time Steps

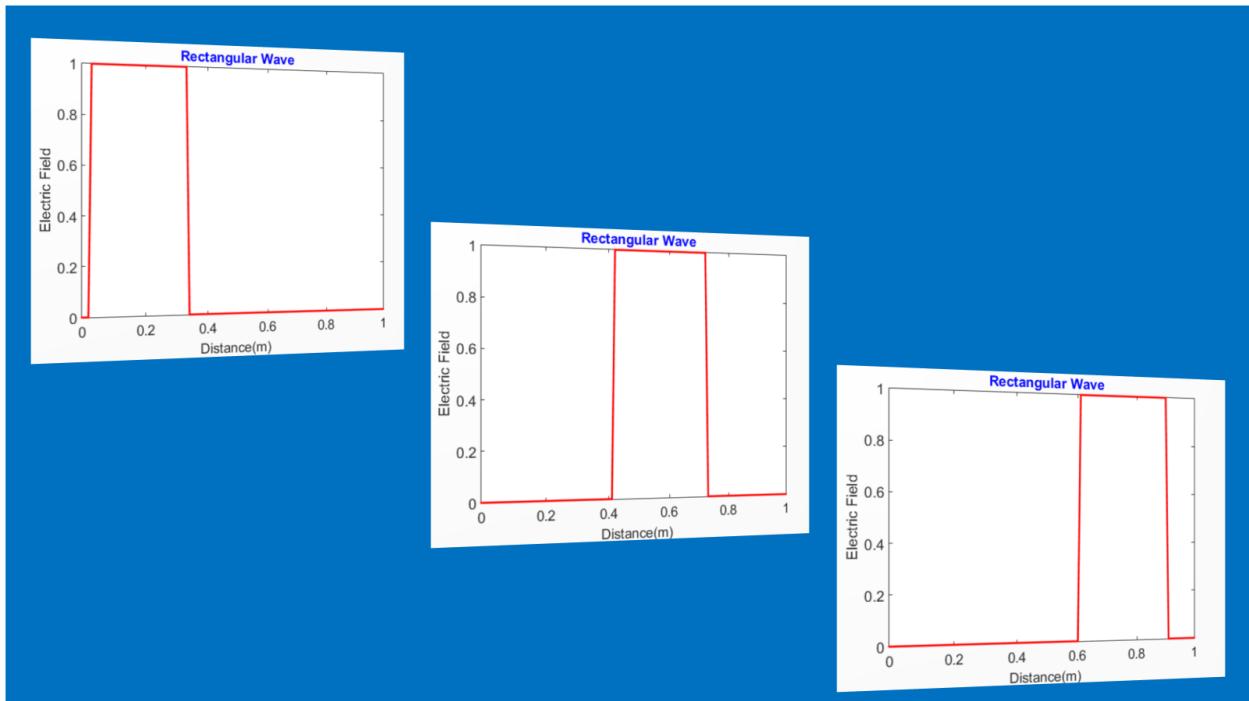

Contact Us for More Details

**CodeSScientific Photonics**

[sales@codesscientific.com](mailto:sales@codesscientific.com) / [www.codesscientific.com](http://www.codesscientific.com)